


FIRMWARE UPDATE

There is new firmware available for Polyphrase, version 2.3. If your Polyphrase has the new firmware, the purple TRIG light will blink three times when you power on the pedal.

Firmware v2.3 Updates:

- Trails mode
 - Midi CC #16, 0-63: OFF, 64-127: ON
 - Hold the “TRIG FUNCTION” button during power up to adjust mode. You will see the tap tempo or infinite led blink to indicate the trails mode.
 - Tap tempo (blinks): Analog bypass, no trails
 - Infinite (blinks): Digital pass through, trails
- Midi clock tracking improvement, more stable.

How to update POLYPHRASE firmware

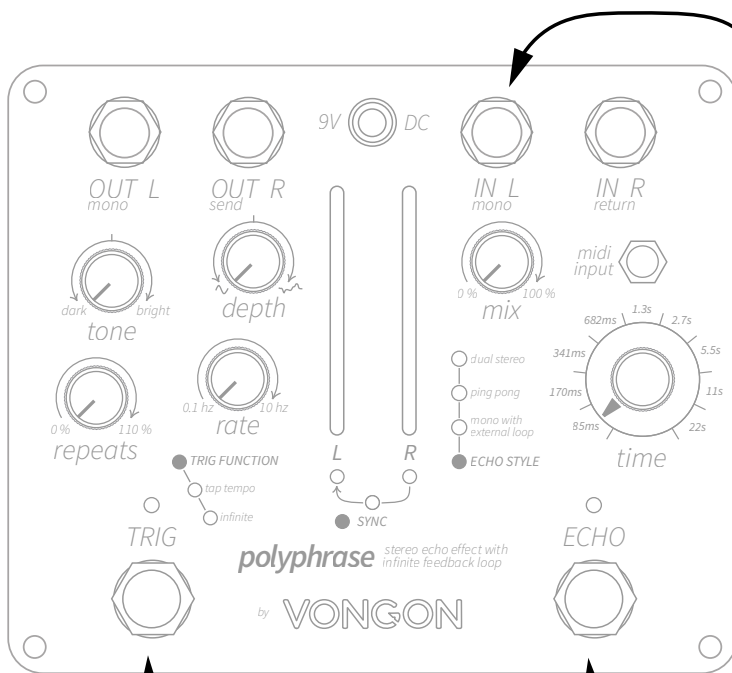

1. Power on POLYPHRASE while holding down both footswitches. Both purple LEDs should start to slowly blink, indicating that the pedal is ready to load new firmware.

2. Play the firmware .WAV file into the **IN L** jack. You can use a phone, computer, audio interface, etc.

If the pedal is correctly reading the firmware, the TRIG led will blink quickly for 5 to 10 seconds, then the ECHO led will blink once. This process will repeat until the firmware is completely loaded.

If the pedal is not able to read the audio file, both purple LEDs will blink quickly. Try powering off the pedal and starting again. Try adjusting the volume of the audio file.

If your pedal has the new firmware, the purple TRIG light will blink three times when the pedal is powered on.

Please contact support@vongon.com for questions.